



CREATIVE LIGHTING DESIGN AND SOLUTIONS

Tel:+263(242)369674 Ph:+263774924484 E:info@ecolighting.co.zw

A:14Westcott Rd Mt Pleasant Harareasant, Harare



Different situations, Different lights.

- 8AM**: The light of the morning gives energy
- 9AM**: Keep focus on cold color temperature
- 6PM**: Soft white light is suitable for reading
- 8PM**: Low brightness creates lazy atmosphere

Control lighting anywhere

- Remote control from home**: Anywhere in the world, you can Turn on TUYA APP to control the lighting at home.
- Set lighting time**: Set switch schedules for different areas of the family
- Dimmer**: Turn on TUYA APP set the color temperature you need






IMPERIA



Material: Aluminum die-casting




Easy installation

CRI>80



Item No.	Power/W	Lumen/LM	Size/MM	Hole cut
S01005-120	8W	680lm	120mm	surface
S01005-170	15W	1190lm	170mm	surface
S01005-225	22W	2040lm	225mm	surface
S01005-300	30W	2660lm	300mm	surface

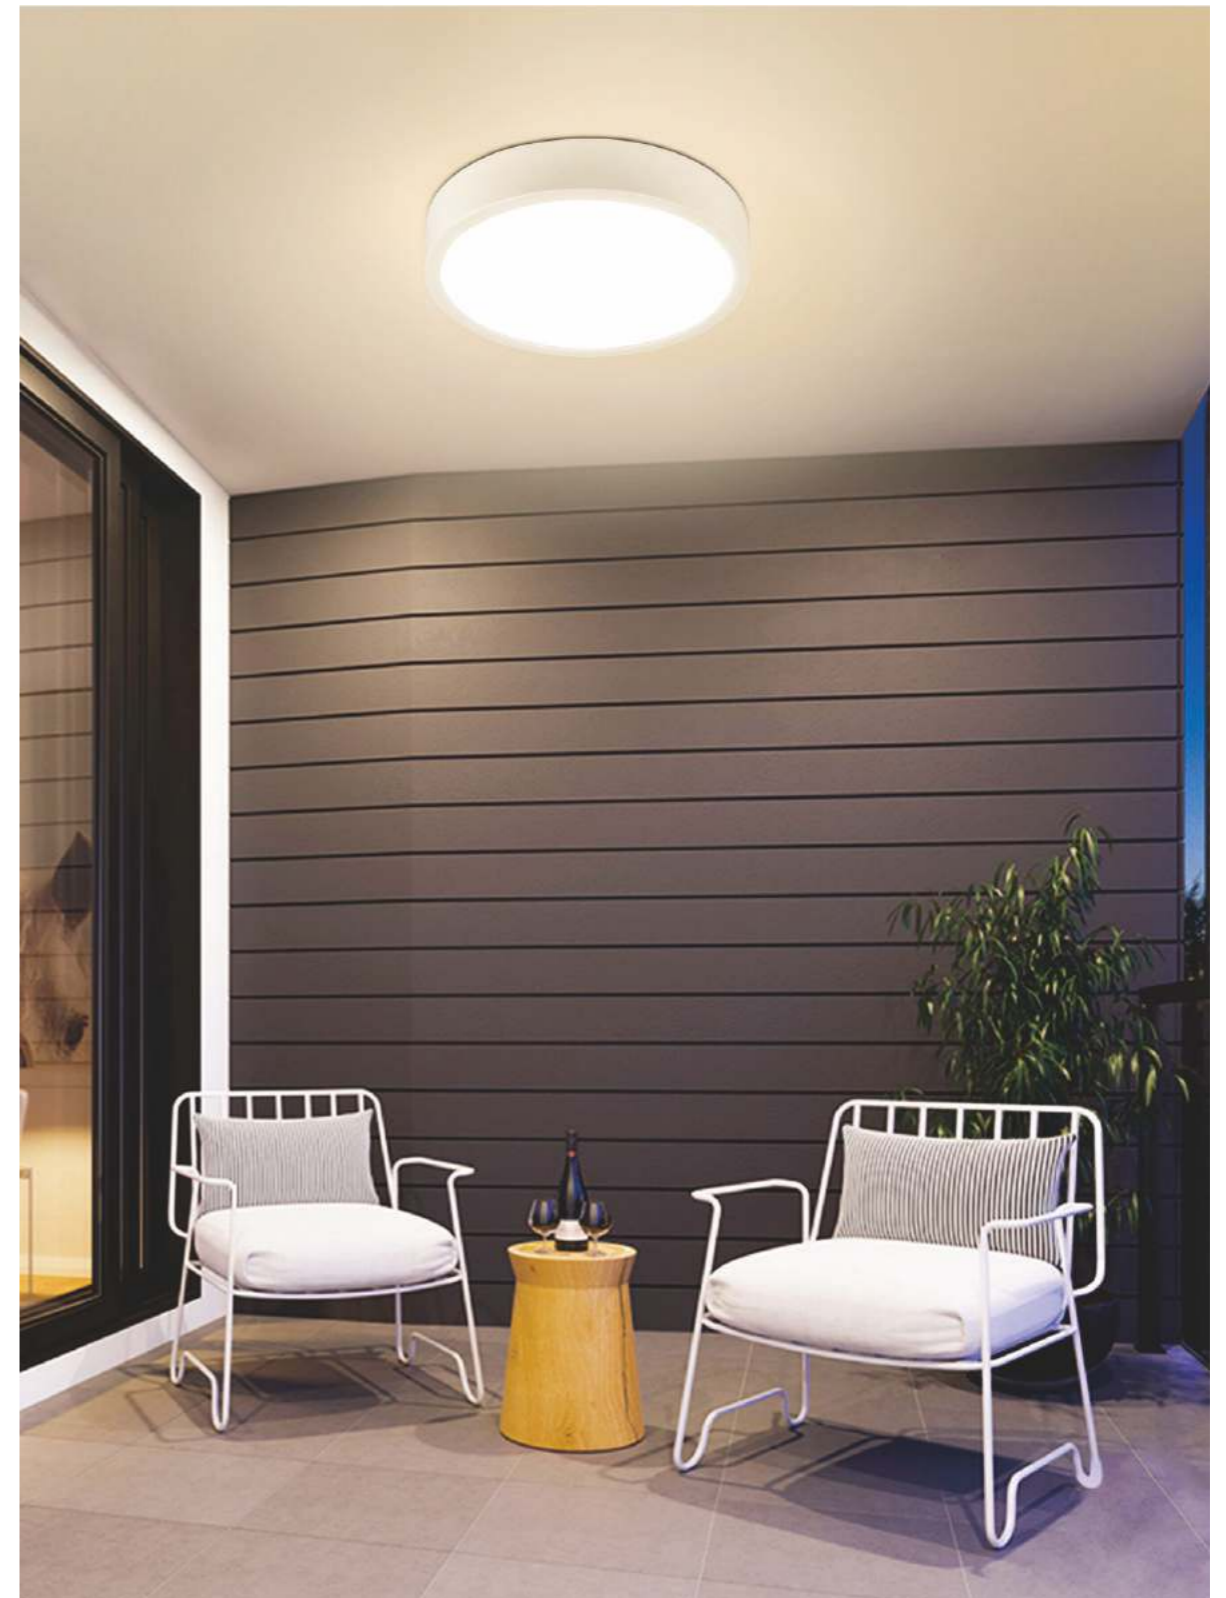

PANEL LIGHT



.....05-10



WIRELESS CHARGE WALL LAMP



.....62-65



LINEAR LIGHT



.....11-16



STEP LIGHT



.....66-67



DOWN LIGHT



.....17-32



MAGNETIC TRACK LIGHT



.....68-77



SPOT LIGHT



.....33-59



TRACK LIGHT



.....78-91



PENDANT LIGHT



.....60-61



GU10 SPOT LIGHT



.....92-99





PANEL LIGHT



LORIA



Material: Aluminum die-casting



Easy installation

CRI>80




Item No.	Power/W	Lumen/LM	Size/MM	Hole cut
S01006-120	8W	680lm	120x120mm	surface
S01006-170	15W	1190lm	170x170mm	surface
S01006-225	22W	2040lm	225x225mm	surface
S01006-300	30W	2660lm	300x300mm	surface






MASS



ALESS





CRI>80



Item No.	Power/W	Lumen/LM	Size/MM	Hole cut
S01001-90	6W	420lm	φ 90mm	φ 80mm
S01001-145	12W	1020lm	φ 145mm	φ 130mm
S01001-175	18W	1480lm	φ 175mm	φ 160mm
S01001-225	24W	2040lm	φ 225mm	φ 200mm
S01002-90	6W	450lm	90*90mm	80*80mm
S01002-145	12W	960lm	145*145mm	130*130mm
S01002-175	18W	1440lm	175*175mm	160*160mm
S01002-225	24W	1920lm	225*225mm	200*200mm




COCO

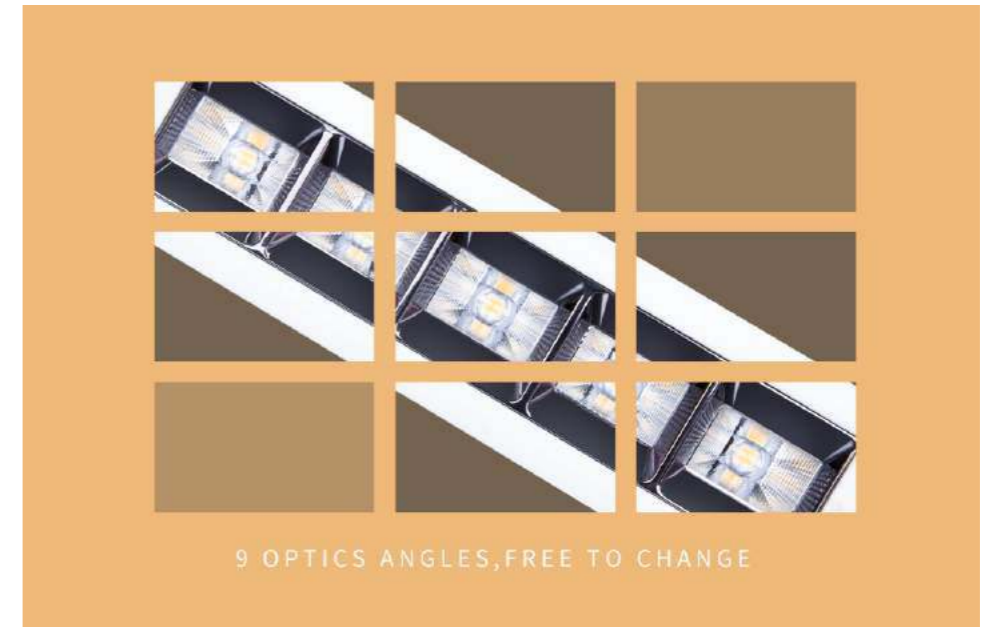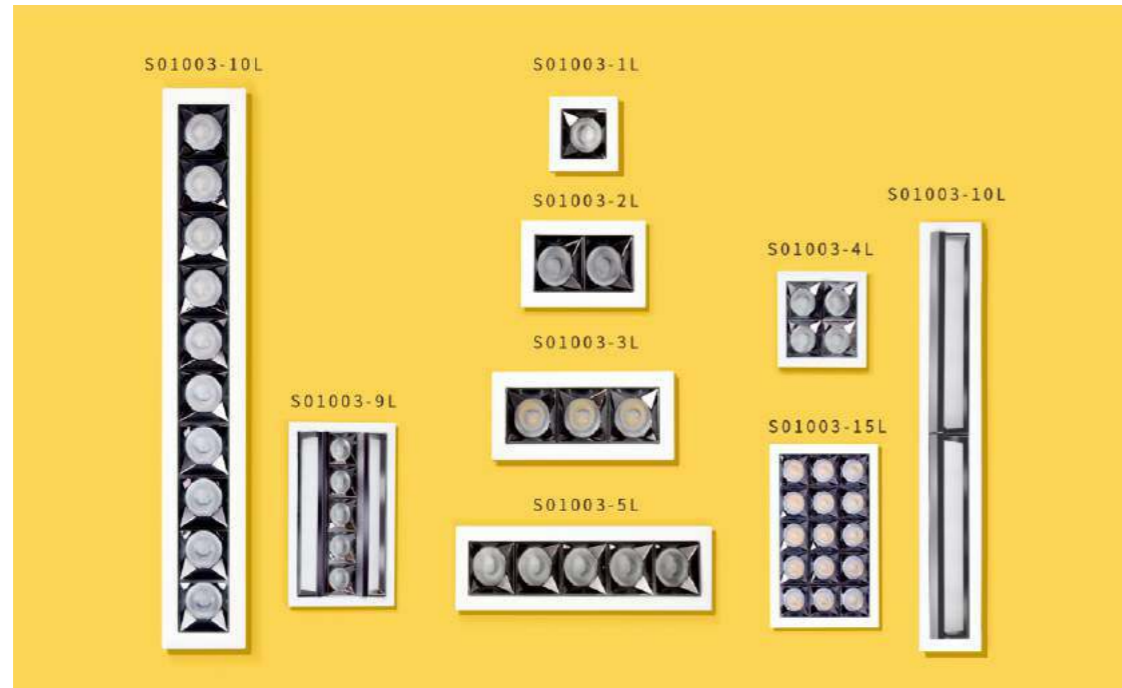

9 OPTICS ANGLES, FREE TO CHANGE

ITEM NO.	POWER	Lumen(lm)	SIZE(mm)	HOLE CUT(mm)
S01003-1L	6W	740lm	57*57*H40mm	45*45mm
S01003-2L	10W	1110lm	57*95*H40mm	45*85mm
S01003-3L	13W	1452lm	59*135*H40mm	45*135mm
S01003-4L	13W	1452lm	95*95*H40mm	85*85mm

ITEM NO.	POWER	Lumen(lm)	SIZE(mm)	HOLE CUT(mm)
S01003-5L	20W	2265lm	59*211*H60mm	45*195mm
S01003-9L	26W	3220lm	135*135*H64mm	125*125mm
S01003-10L	30W	3528lm	61*403*H64mm	45*390mm
S01003-15L	34W	4080lm	137*214*H64mm	125*200mm

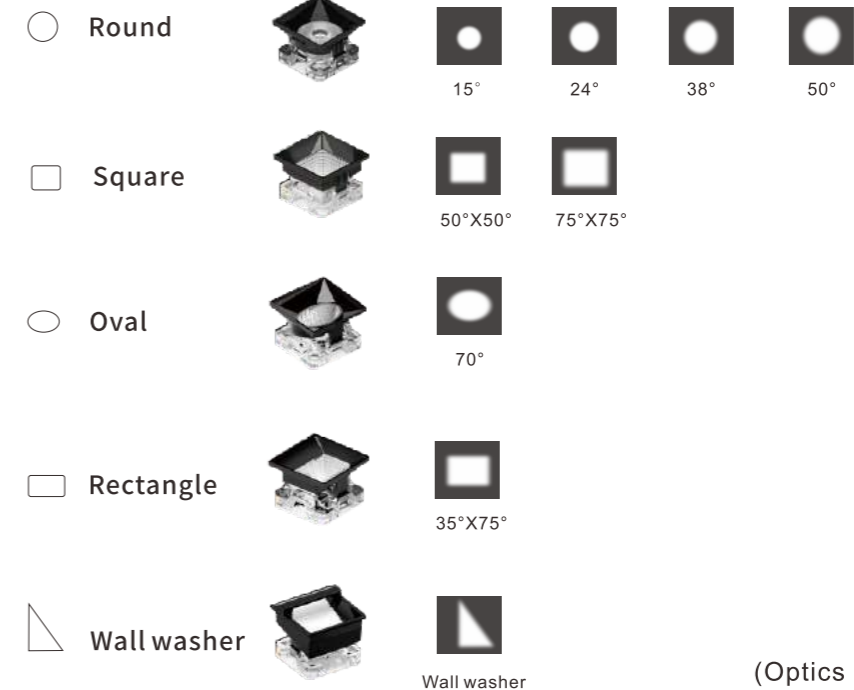

(Optics optionals)



CRI>80 IP20

Superior linear light luminaire made of aluminum die-casting
 Frameless beautiful looking & fasten clips installation, screwless.



GODIVAL

ITEM NO.	POWER	Lumen(lm)	SIZE(mm)
S01004-4L	13W	1452lm	82*82*H70mm
S01004-5L	20W	2265lm	196*44*H70mm
S01004-9L	26W	3220lm	120*120*H70mm
S01004-10L	30W	3528lm	387*45*H70mm
S01004-15L	34W	4080lm	196*120*H70mm




CRI>80 IP20

9 OPTICS ANGLES, FREE TO CHANGE


○ Round					
□ Square					
○ Oval					
□ Rectangle					
△ Wall washer					

(Optics optionals)

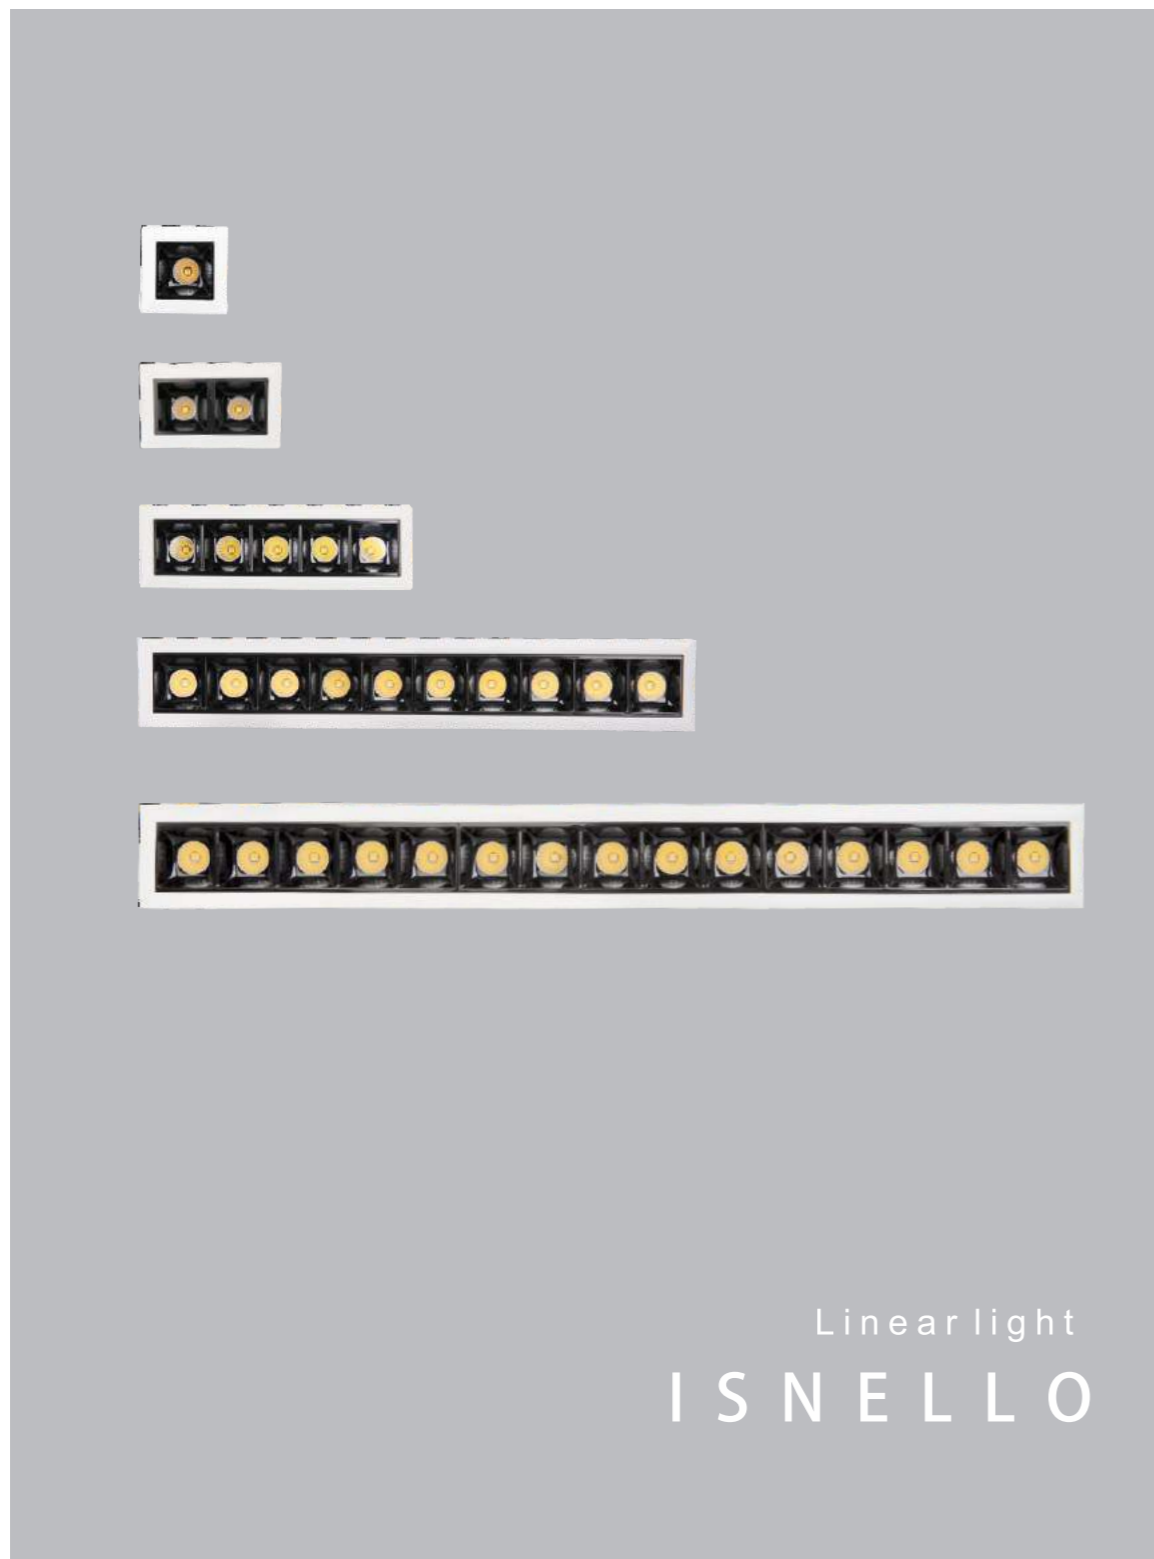


S01013-1L

Size:45*45*47mm
Power:3W
Lumen:225lm
Hole cut:37*37mm




S01013-10L

Size:279*45*47mm
Power:20W
Lumen:1900lm
Hole cut:276*37mm




S01013-2L

Size:75*45*47mm
Power:6W
Lumen:450lm
Hole cut:67*37mm




S01013-15L

Size:412*45*47mm
Power:30W
Lumen:2850lm
Hole cut:403*37mm

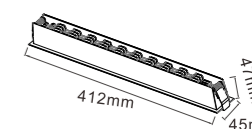

S01013-5L

Size:147*45*47mm
Power:10W
Lumen:900lm
Hole cut:140*37mm



Optics optional:15°/30°/45°




TURN

Popular LED down light series
Color changeable 3000K / 4000K / 6000K




S01007 (Single color)



(with switch)


S01007B (CCT change)

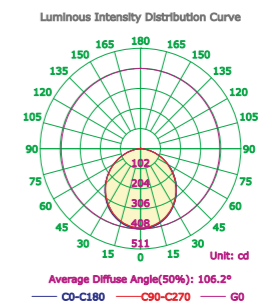

CRI>80 **Lifud**

Item No.	Power/W	Lumen/LM	Size/MM	Hole cut
S01007. 1	7W	525lm	90x34mm	φ 80mm
S01007. 2	12W	865lm	115x34mm	φ 90mm
S01007. 3	15W	1200lm	144x40mm	φ 120mm
S01007. 4	20W	1950lm	180x40mm	φ 150mm
S01007. 5	30W	2915lm	225x45mm	φ 200mm

FLAT



C01005-90



C01005-120



C01005-170




C01005-225





CRI>80

Item No.	Power/W	Lumen/LM	Size/MM	Hole cut
C01005-90	7W	558lm	φ90x46mm	φ70mm
C01005-120	10W	900lm	φ120x48.5mm	φ90mm
C01005-170	15W	1475lm	φ170x57.5mm	φ145mm
C01005-225	30W	2780lm	φ225x59.5mm	φ200mm

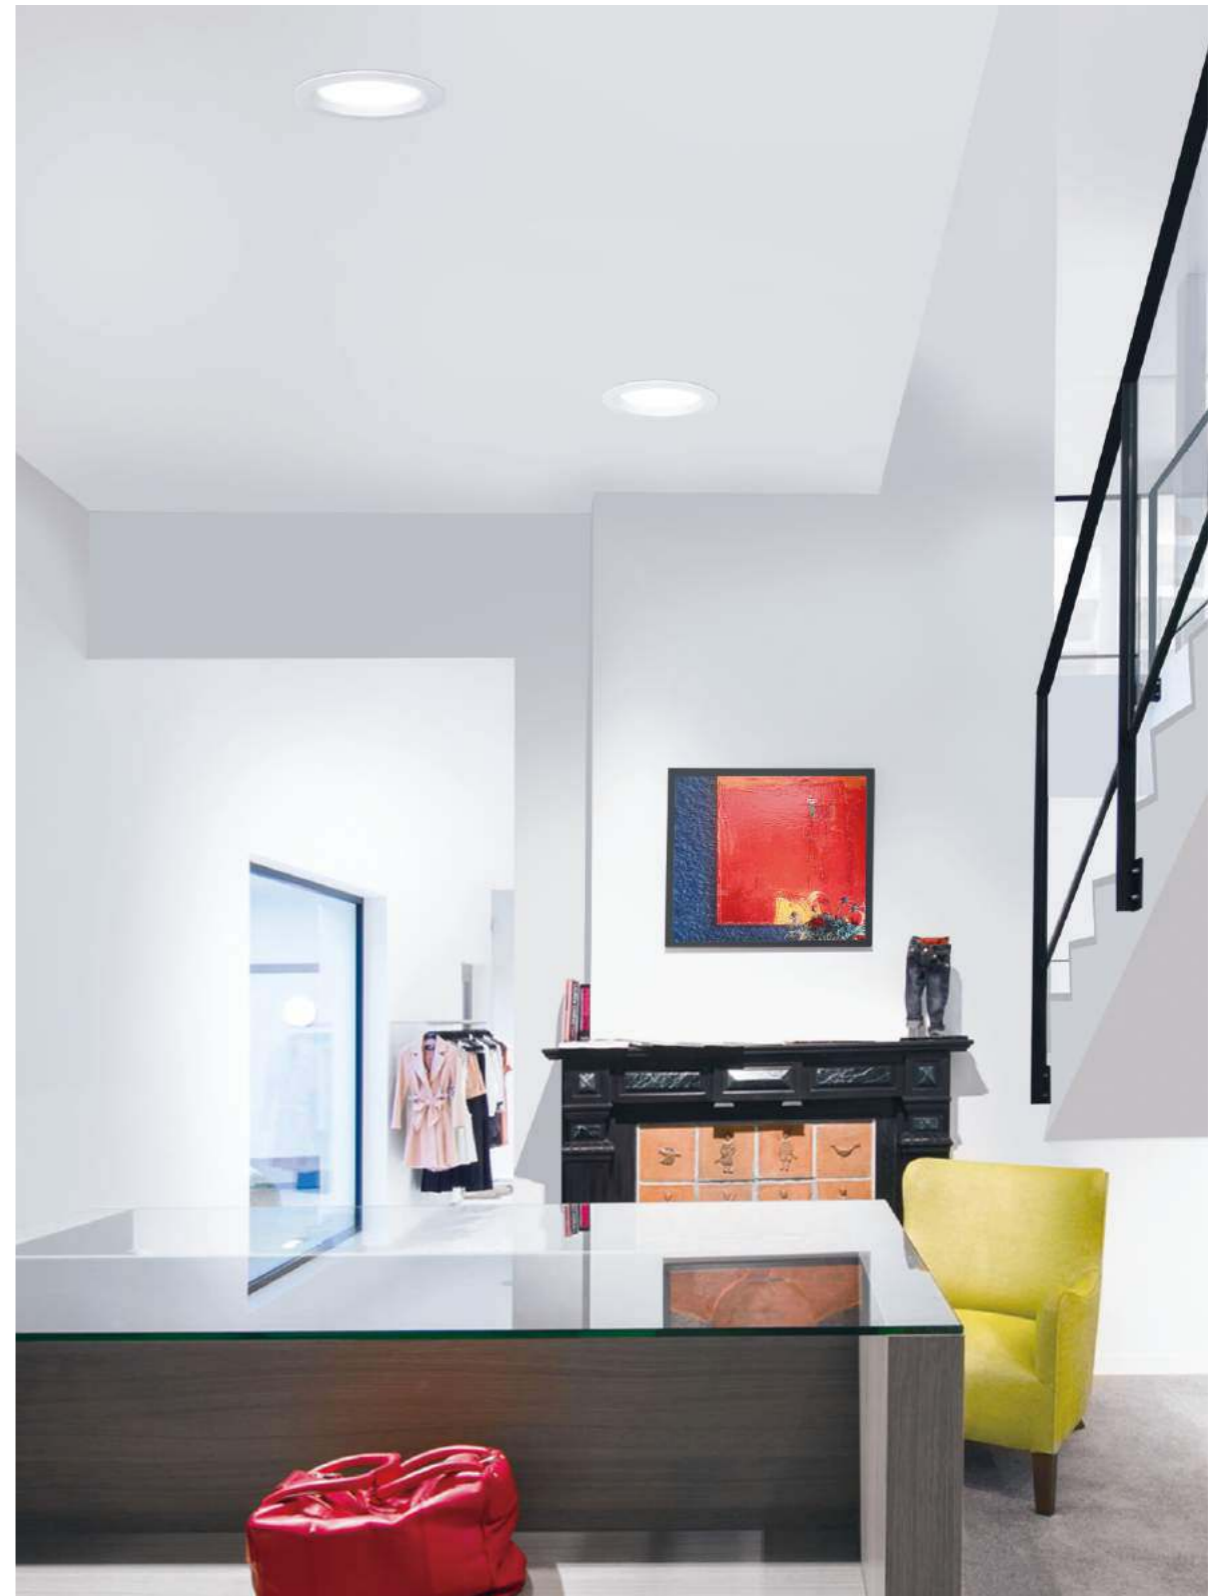

STAIR

D O W N L I G H T

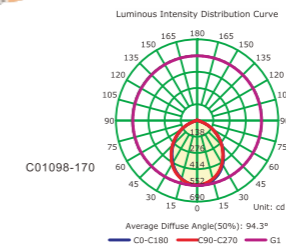


CRI>80

Item No.	Power/W	Lumen/LM	Size/MM	Hole cut
C01098-90	7W	540lm	φ 90x52.5mm	φ 70mm
C01098-120	10W	900lm	φ 120x49mm	φ 95mm
C01098-170	15W	1470lm	φ 170x49mm	φ 150mm
C01098-225	30W	2850lm	φ 225x57.5mm	φ 200mm




front



SMD indirect reflected light
No glare and no shadows



back



CRI>80


Lifud®

Item No.	Power/W	Lumen/LM	Size/MM	Hole cut
S01085. 1	8W	330lm	105x35mm	95mm
S01085. 2	12W	660lm	150x50mm	135mm
S01085. 3	18W	1080lm	173x55mm	160mm
S01085. 4	24W	1440lm	230x75mm	205mm

RATE



- Matt white
- Satin nickle

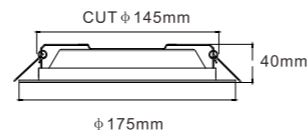

CRI>80






Item No.	Power/W	Lumen/LM	Size/MM	Hole cut
S01021.1	7W	560lm	φ 105	φ 90
S01021.2	12W	960lm	φ 175	φ 145
S01021.3	20W	1600lm	φ 225	φ 190





SPACE

Aluminum recessed downlight unique and elegant design
Smart heat dissipation SMD indirect reflected light no glare & no shadows


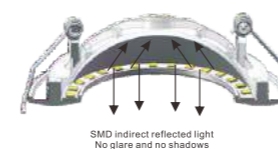


CRI>80 **Lifud**

Item No.	Power/W	Lumen/LM	Size/MM	Hole cut
S01086. 1	6W	330lm	105x65mm	Surface
S01086. 2	12W	660lm	150x75mm	Surface
S01006. 3	18W	1080lm	173x80mm	Surface
S01006. 4	24W	1440lm	230x90mm	Surface



CORTO


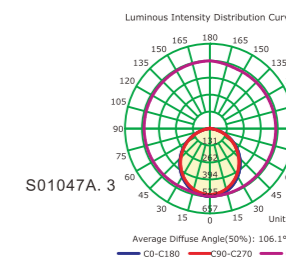



CRI>80

Item No.	Power/W	Lumen/LM	Size/MM	Hole cut
S01047A. 1	7W	490lm	90x57mm	Surface
S01047A. 2	12W	960lm	120x58mm	Surface
S01047A. 3	18W	1620lm	140x58mm	Surface

P R E T T Y

Lastest elegant dimmable spot light.
 Optimized light distribution design solution to make
 the optical property much more excellent, UGR<16.
 Internal dimmable driver PF0.9 flicker free
 optics angle:40°



CRI>80

Item No.	Power/W	Lumen/LM	Size/MM	Hole cut
C01009	8W	870lm	φ 84x90.9mm	φ 72mm


MINI MONO



CRI>80 **CREE** **Galoppato**





Item No.	Power/W	Lumen/LM	Size/MM	Hole cut
S01013-1R	3.3W	200lm	φ 35mm	φ 29mm

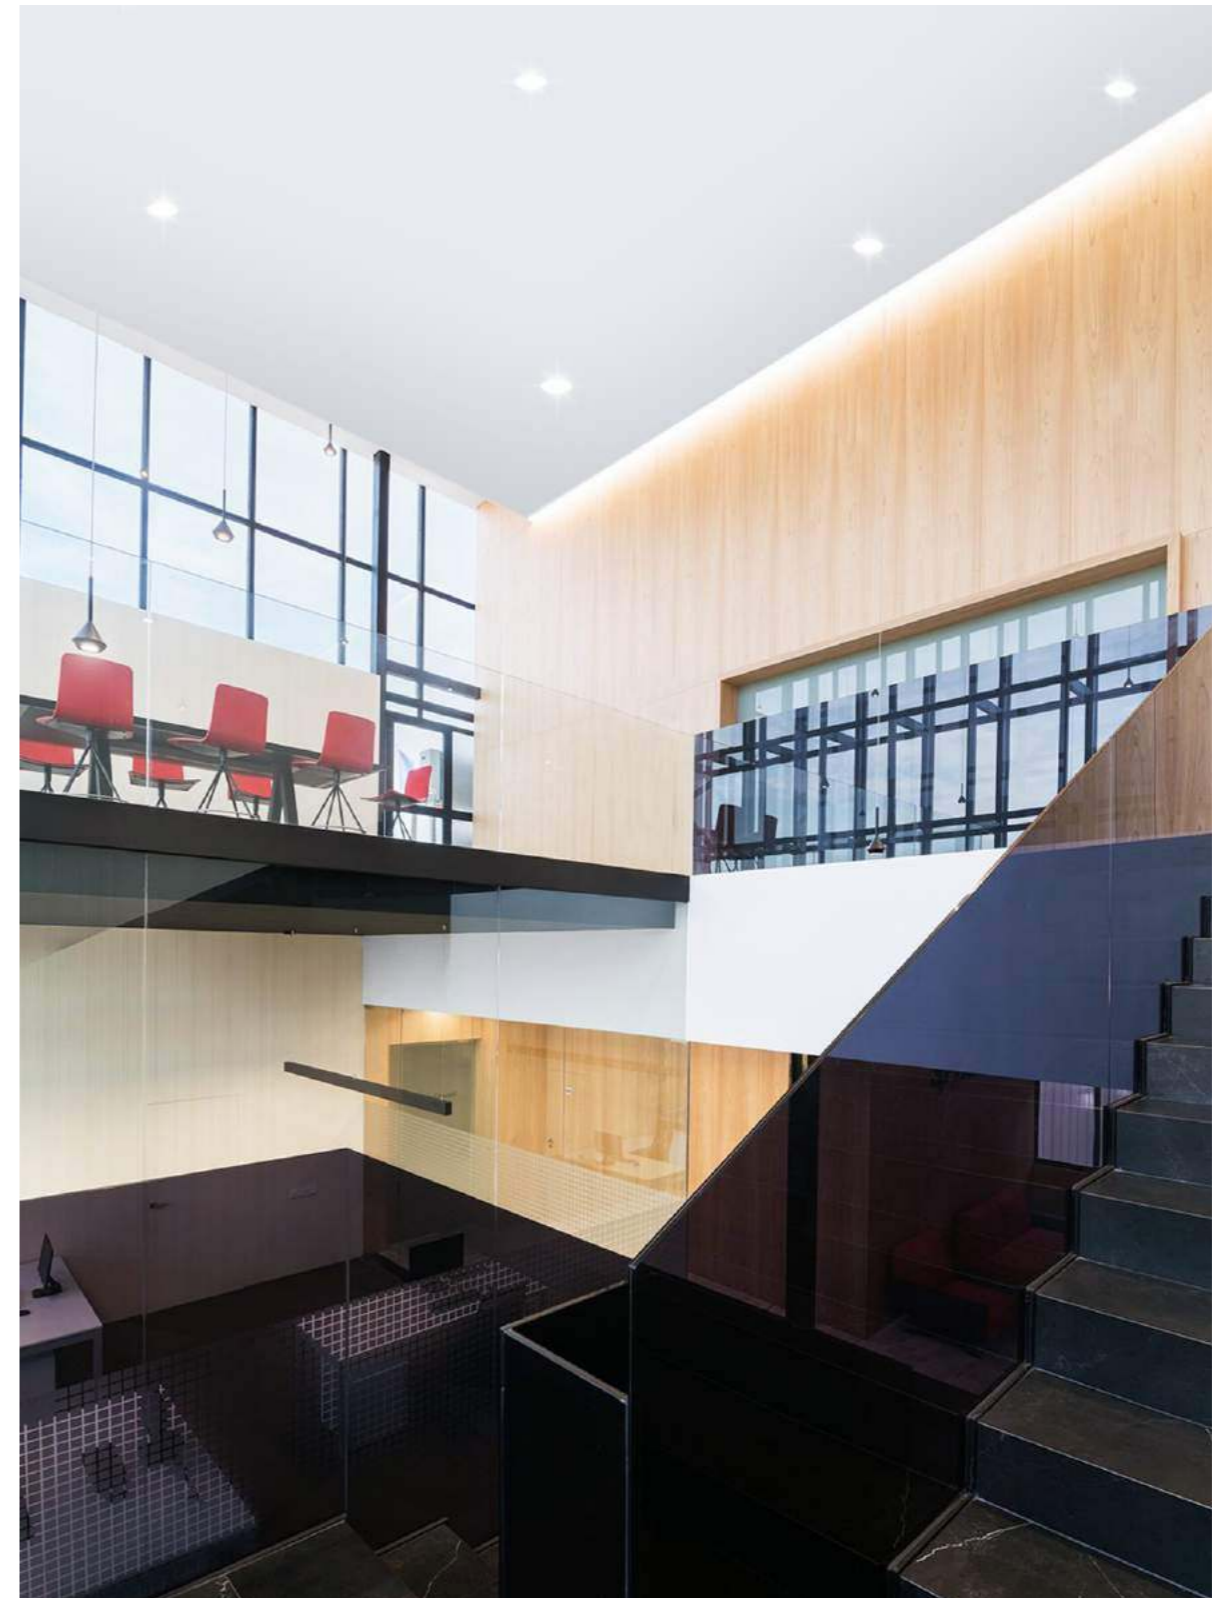




PYRA





CRI>80


Item No.	Power/W	Lumen/LM	Size/MM	Hole cut	optics optional
C01049. 1	10W	960lm	83*83*H75mm	75mm	15° 24° 38° 60°
C01049. 2	15W	1400lm	105*105*H81mm	95mm	20° 30° 38° 60°
C01049. 3	25W	2000lm	130*130*H88mm	120mm	15° 24° 38° 60°
C01049. 4	35W	3500lm	160*160*H118mm	145mm	15° 24° 38° 60°
C01049. 5	40W	4200lm	225*145*H145mm	200mm	24° 38° 60°

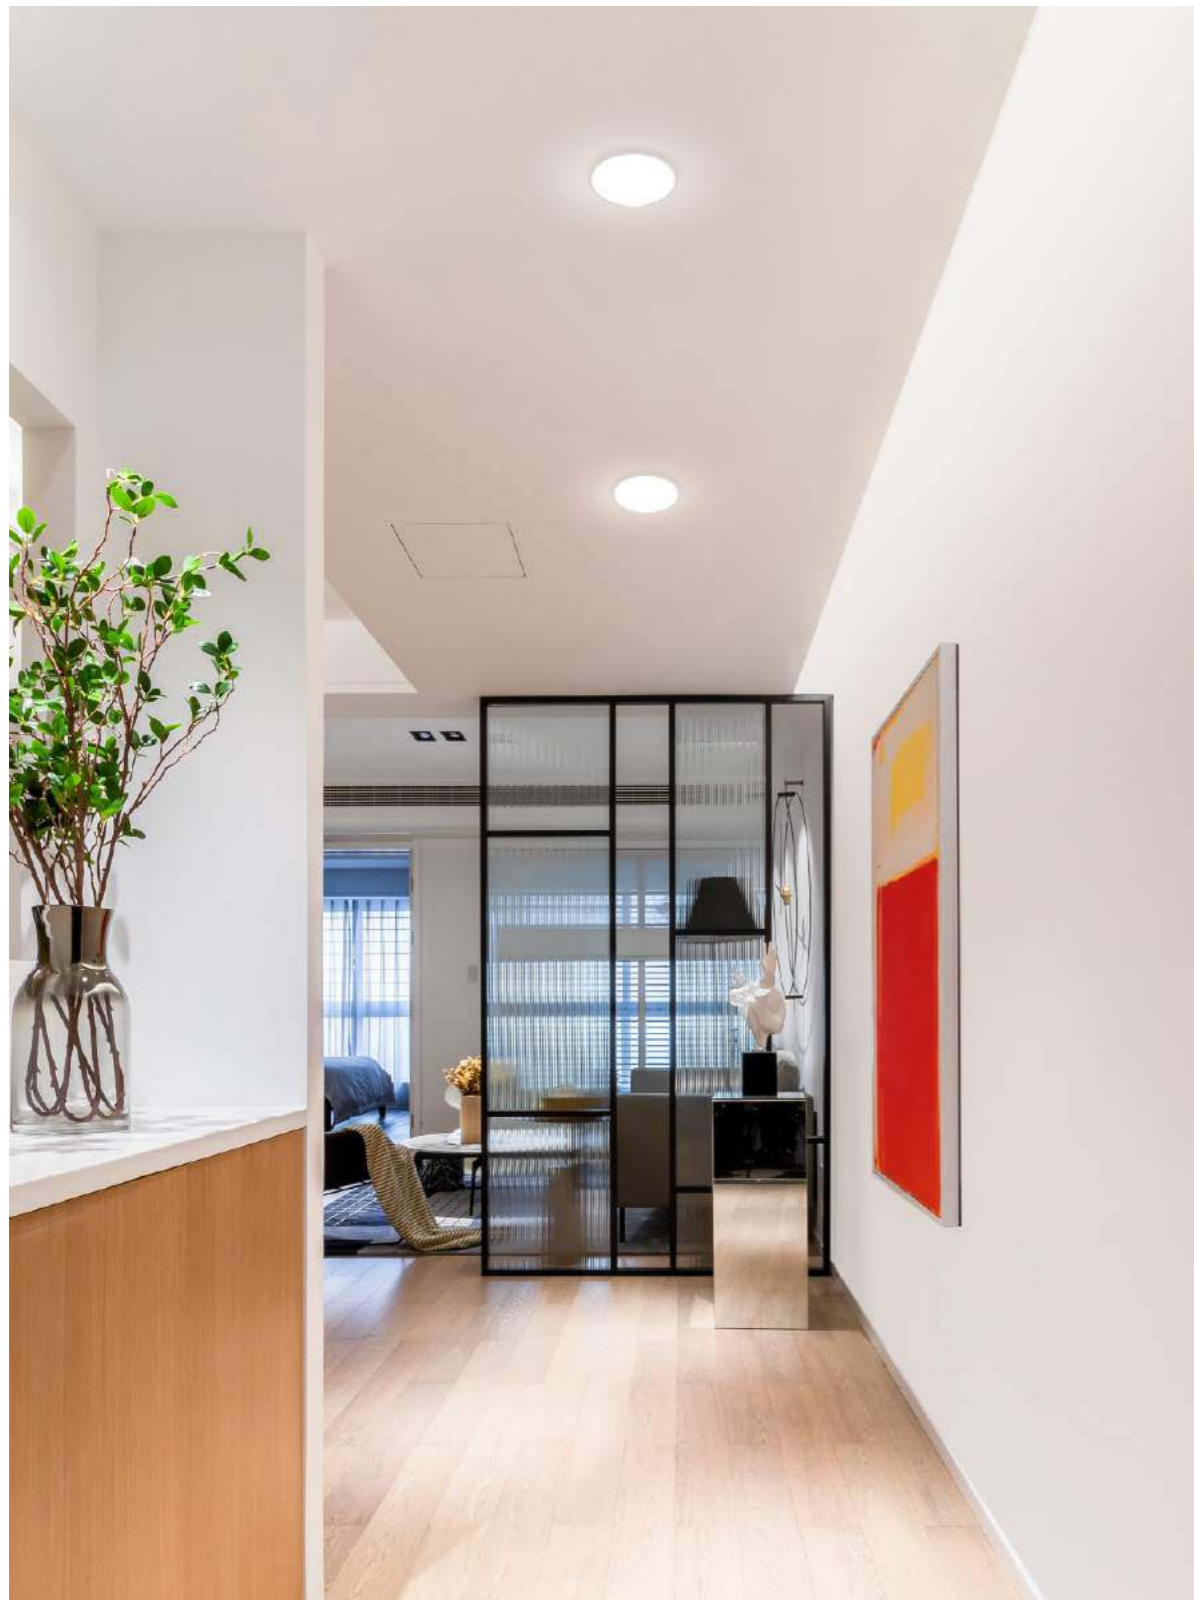

CONE

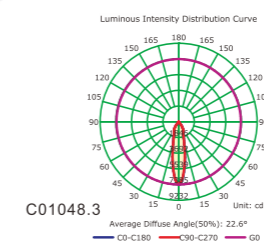


CRI>80



Item No.	Power/W	Lumen/LM	Size/MM	Hole cut	optics optional
C01048. 1	10W	960lm	φ 83*H75mm	75mm	15° 24° 38° 60°
C01048. 2	15W	1400lm	φ 105*H81mm	95mm	20° 30° 38° 60°
C01048. 3	25W	2000lm	φ 130*H88mm	120mm	15° 24° 38° 60°
C01048. 4	35W	3500lm	φ 160*H118mm	145mm	15° 24° 38° 60°
C01048. 5	40W	4200lm	φ 225*H145mm	200mm	24° 38° 60°

NORA

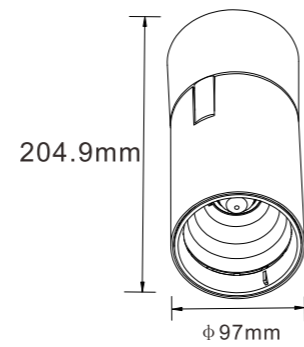

LIFUD **EDISON** optics optional : 40°/15°/24°



Item No.	Power/W	Lumen/LM	Size/MM	CRI
C01015	30W	3550lm	φ97mm*204.9mm	>80





SUM





TIK



Material: Aluminum die-casting
optics :40°
Rotating 330°,tilting 90°



C01061



C01065





CRI>80 **EDISON** **Galoppato®**



Item No.	Power/W	Lumen/LM	Size/MM	RA
C01061	15W	1650lm	100*105mm	>80
C01065	15W	1650lm	100*105mm	>80



C01102



C01103



CRI > 80 **EDISON** Galoppato®

Item No.	Power/W	Lumen/LM	Size/MM	RA
C01102	8W	760lm	75*83mm	>80
C01103	8W	760lm	75*83mm	>80



FLEX

Materials: Aluminum die-casting
 optics :15°/38°/60°
 Finishing available: sand white, sand black.





C01011-1T4

ITEM NO.: C01011-1T4
 POWER: 8W
 LUMEN: 880lm
 CCT: 4000K
 SIZE: 60*190*98mm
 CRI: >80
 Track system
 With POWERGEAR adapter 4 wires.



Luminous Intensity Distribution Curve(cd/klm)

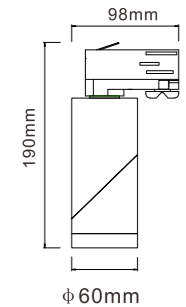
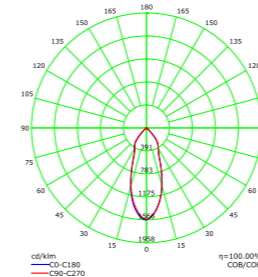


C01011

ITEM NO.: C01011
 POWER: 8W
 LUMEN: 880lm
 CCT: 4000K
 SIZE: 60*136.5mm
 CRI: >80
 surface system



Luminous Intensity Distribution Curve(cd/klm)

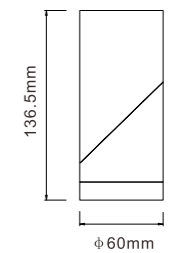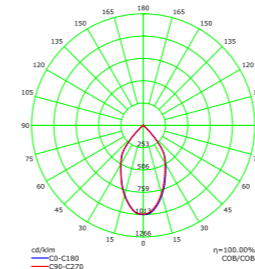





MARIE

EXTENDABLE SPOT LIGHT





Rotating:345° Tilting:90° Optics optional: 15°/24°/38°

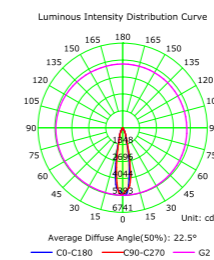



Material:Aluminum
CRI>80

Item No.	Power/W	Lumen/LM	Size/MM	Hole cut	UGR
C01017	12W	1320lm	109*109*118	φ 90mm	<19



Material:Aluminum
CRI>80 **EDISON** **LIFUD**

Item No.	Power/W	Lumen/LM	Size/MM	Hole cut	UGR
C01018	12W	1320lm	109*109*118	φ 90mm	<19

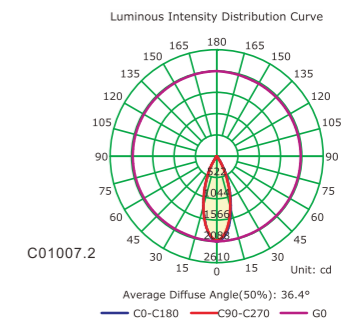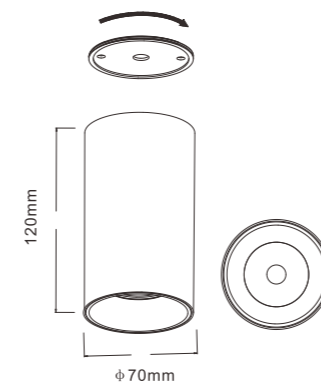

optics :40°



CRI>80

Item No.	Power/W	Lumen/LM	Size/MM	Hole cut	UGR
C01007.1	8W	840lm	70x100mm	Surface	<19
C01007.2	10W	1050lm	70x120mm	Surface	<19



silver



rose gold



gold





brown

optics optional: 15° / 30° / 45°



CRI>80 **CREE** SECCO

Item No.	Power/W	Lumen/LM	Size/MM	UGR
C01013-50	7W	490lm	φ 50*100	<19
C01013-70	12W	960lm	φ 70*100	<19
C01013-90	15W	1500lm	φ 90*115	<19
C01013-110	22W	2200lm	φ 115*130	<19

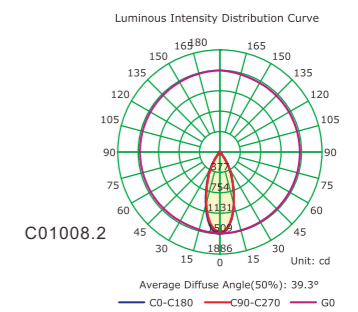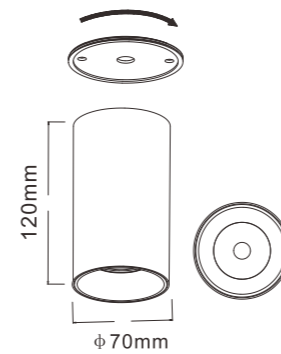

optics optional:20°/40°/60°



CRI>80 **EDISON** **LIFUD**

Item No.	Power/W	Lumen/LM	Size/MM	Hole cut	UGR
C01008.1	8W	800lm	75x100mm	Surface	<19
C01008.2	10W	1000lm	75x120mm	Surface	<19



RUMIA

- Matt white
- Matt black



 CRI>80
 optics :15°/24°/38°











RUMIA



Rumia suspension is a pendant light available in 2 sizes
Length L250mm 7W & L450mm 10W.

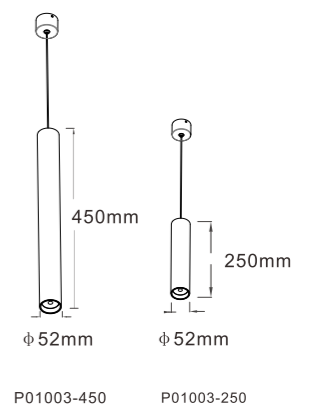

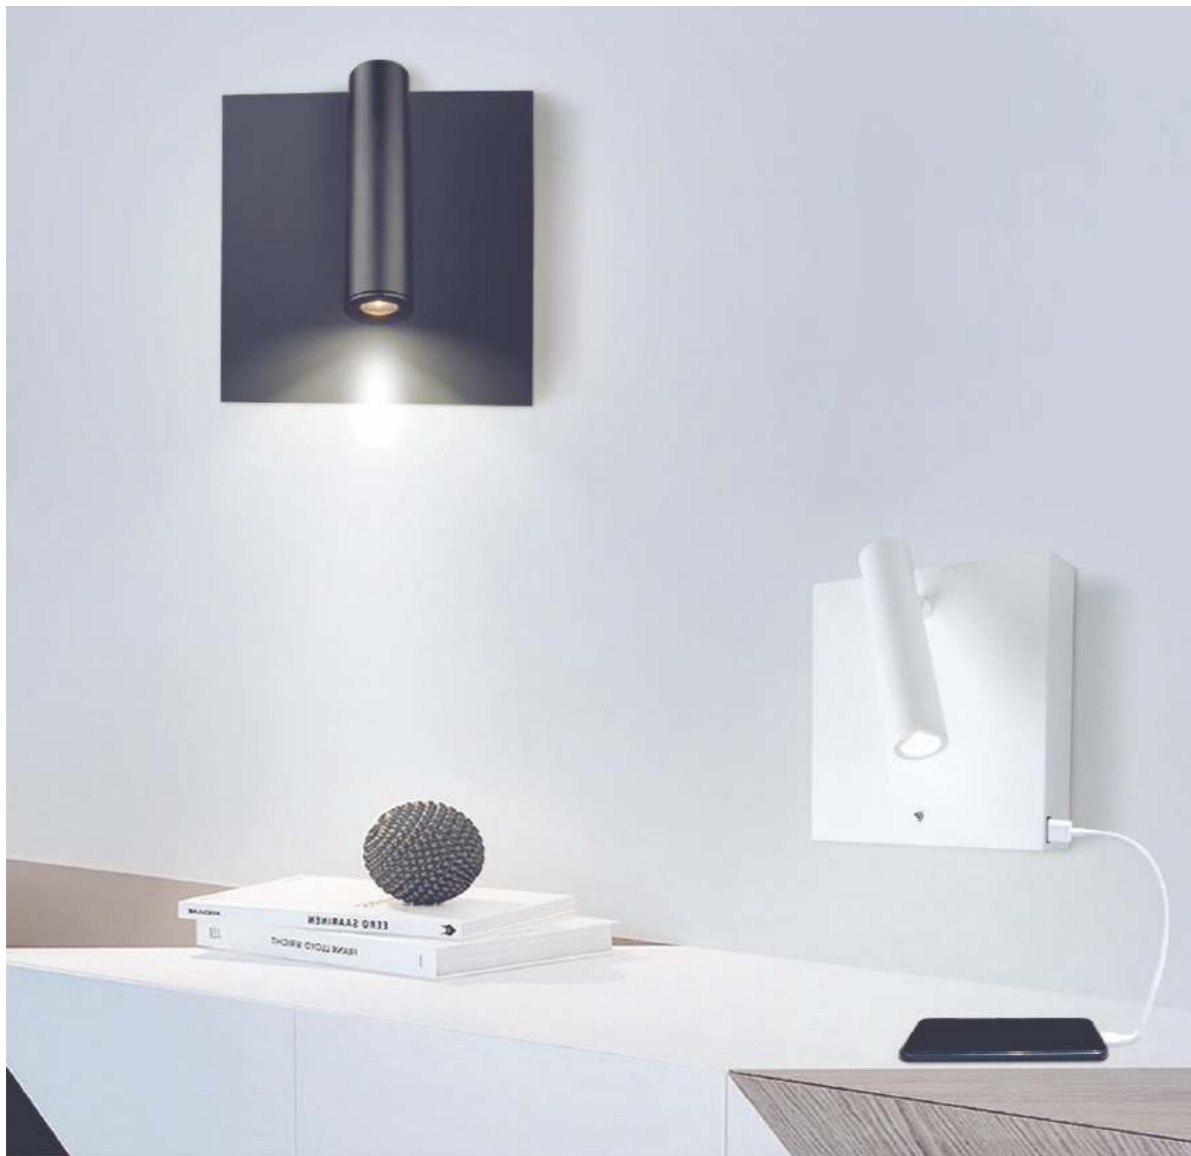

Teslo


Item No: S01018


Wattage: 3W

CRI > 80

Materials: Aluminum die-casting

Black White **CREE**

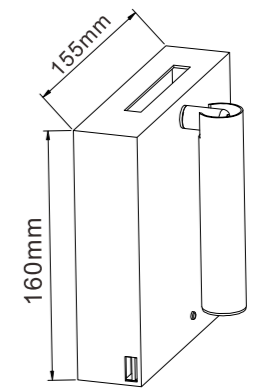

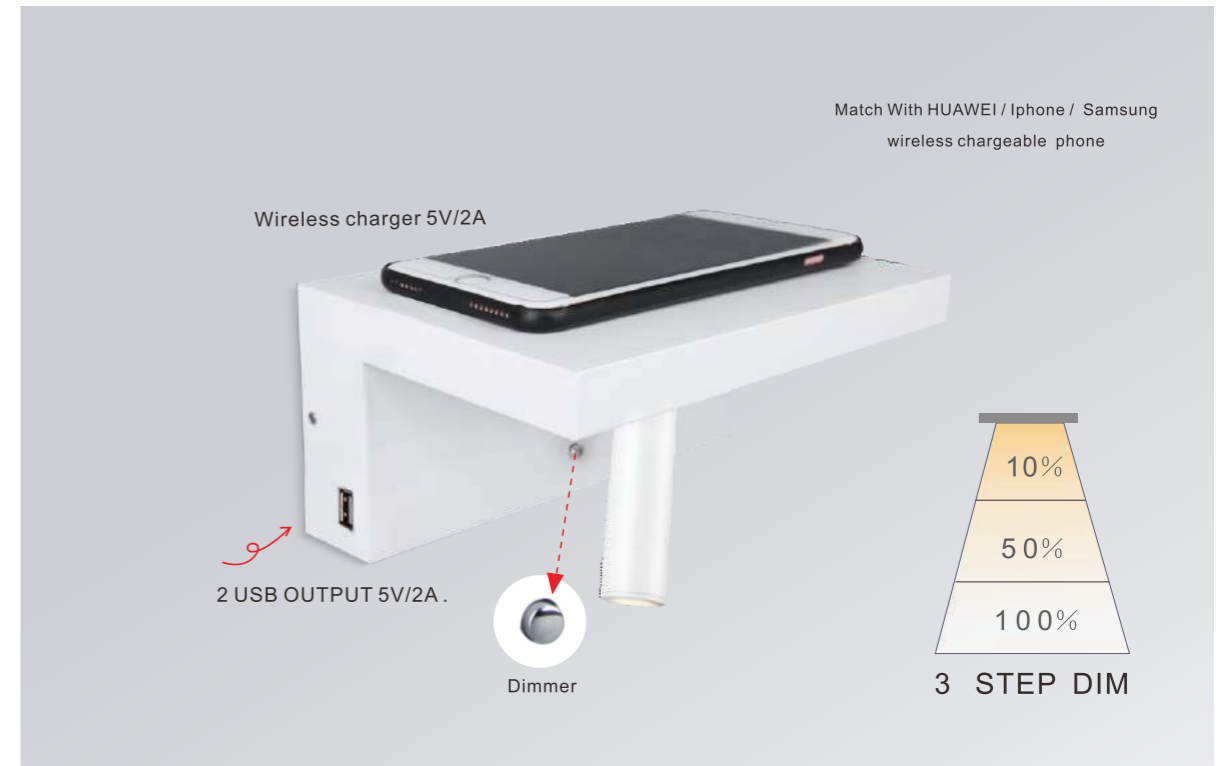

NOAH

Item No: S01038


Wattage: 5W


CRI > 80

Materials: Aluminum die-casting




Black

White


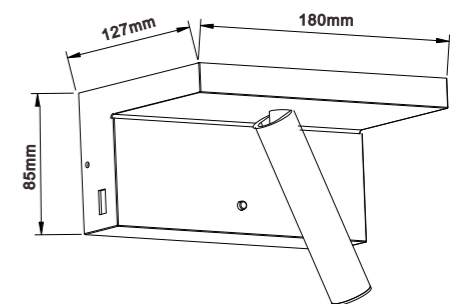


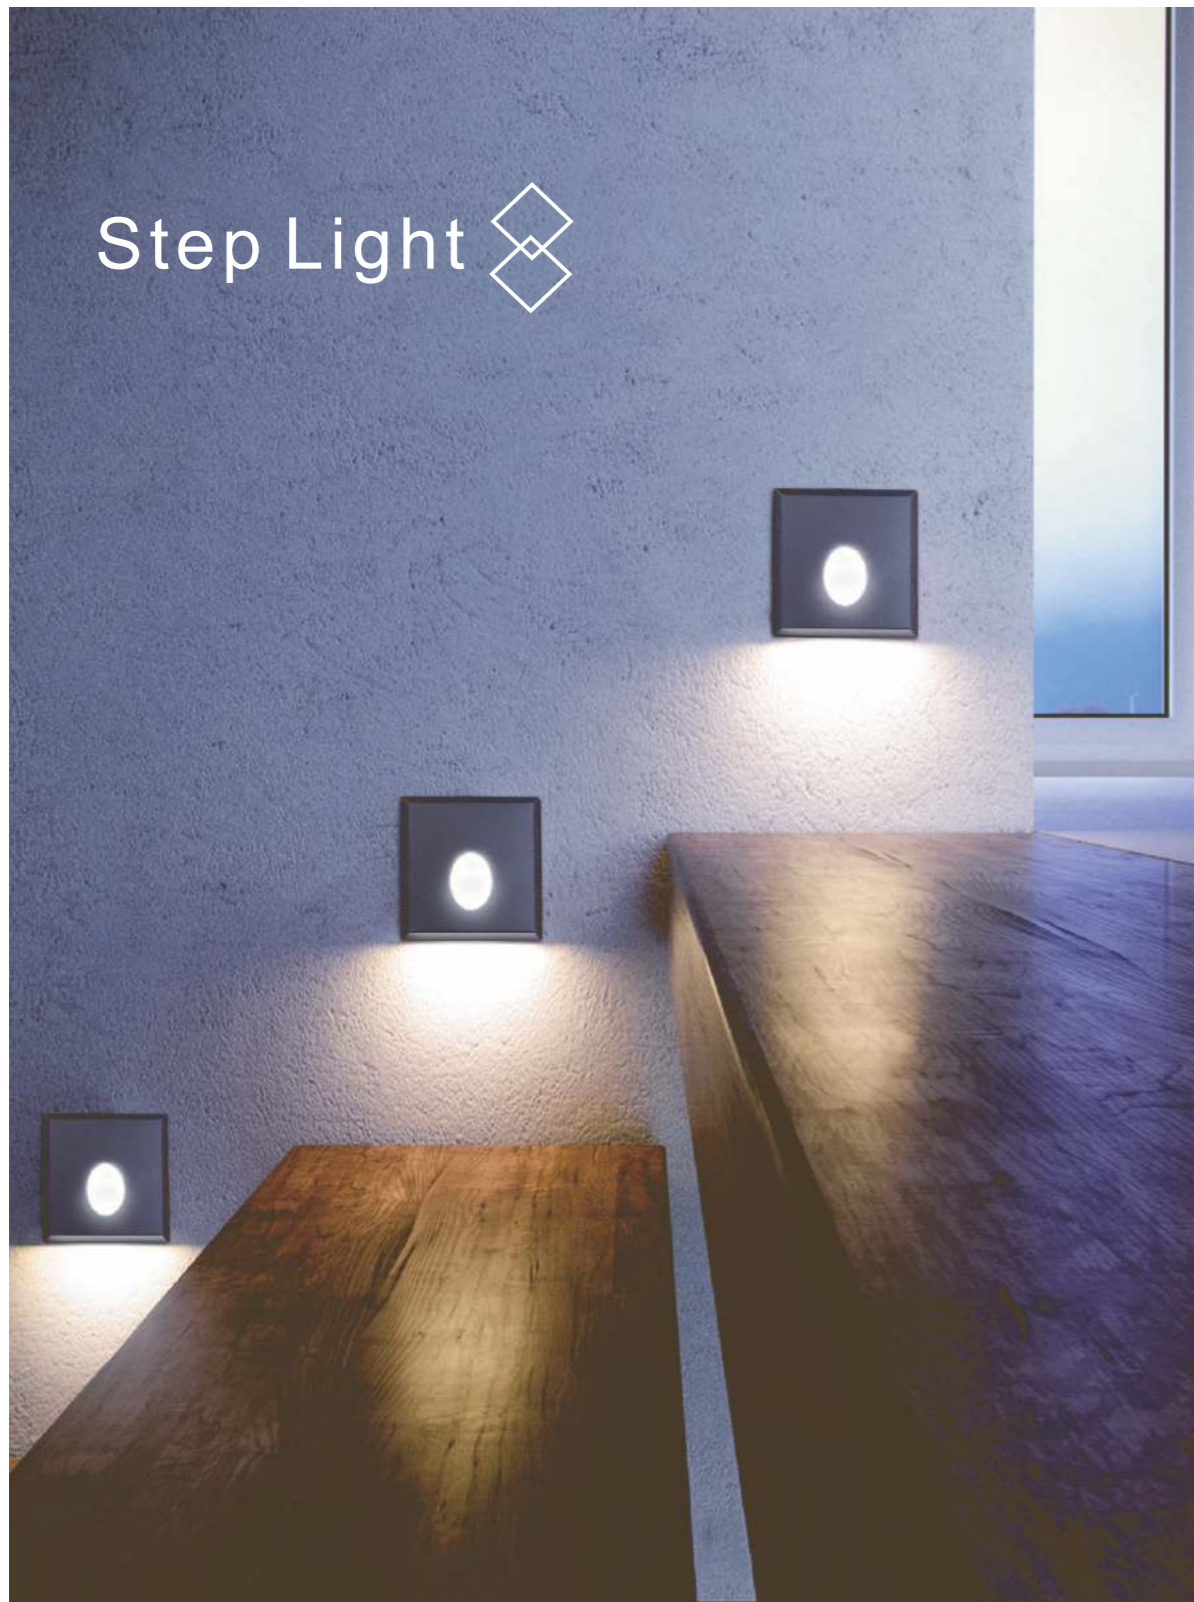

UNO

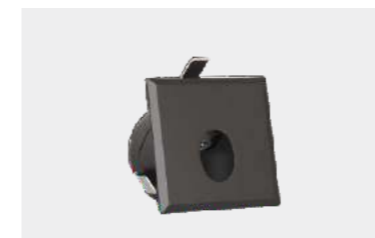

EVO

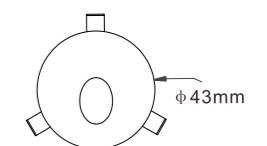

CRI > 80 **CREE** **Galoppato**

Item No.	Power/W	Size/MM	Hole cut	IP
S01009	2W	43x43mm	36 mm	54
S01010	2W	φ 43 m m	36 mm	54



After fix the light to the track
make sure the lock is on position




LOCK

MAGNETIC SYSTEM TRACK LIGHT


Dimmable & color changeable Smart control by APP

Capu

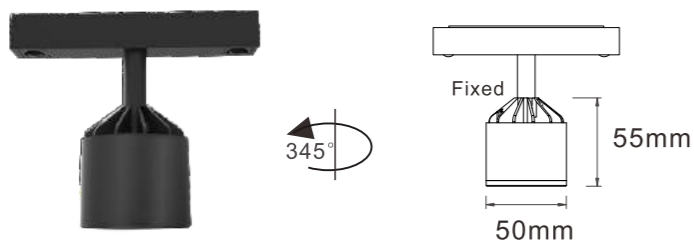

Item No:TS01010.1
 Power:5W
 CRI:90
 Size:50*55mm
 Rotating:345°
 Tilt:fixed
 Lumen:90-100lm/w

Telescope

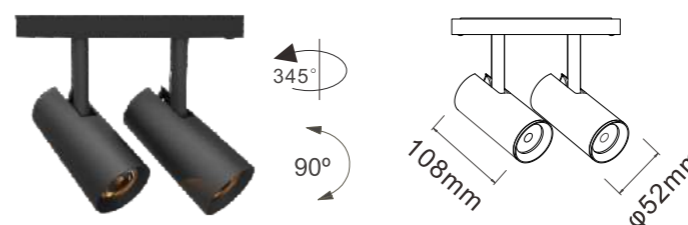


Item No:TS01008.2MT
 Power:2x7W
 CRI:90
 Size:φ52*108mm
 Rotating:345°
 Tilt:90°
 Lumen:90-100lm/w

Capu




Item No:TS01010.2
 Power:2x5W
 CRI:90
 Size:50*55mm
 Rotating:345°
 Tilt:fixed
 Lumen:90-100lm/w

Telescope

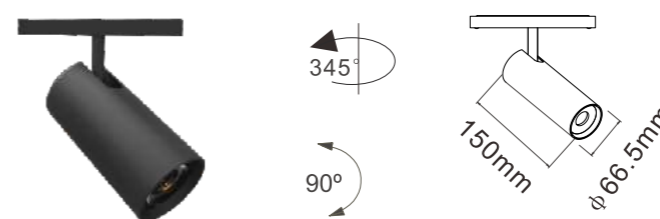


Item No:TS01008.3MT
 Power:20W
 CRI:90
 Size:φ66.5*150mm
 Rotating:345°
 Tilt:90°
 Lumen:90-100lm/w

Telescope

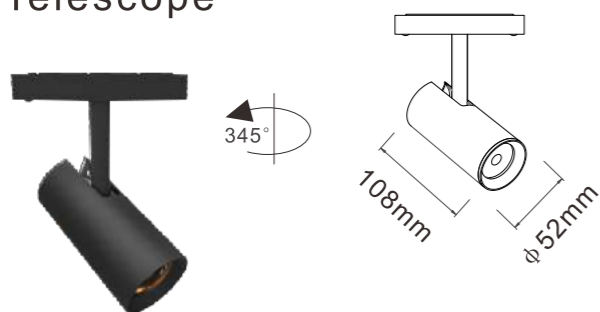

Item No:TS01008.1MT
 Power:7W
 CRI:90
 Size:φ52*108mm
 Rotating:345°
 Tilt:90°
 Lumen:90-100lm/w

Telescope

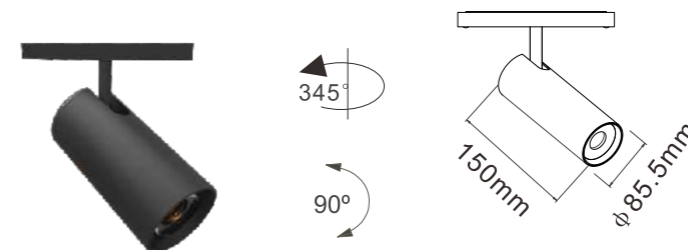


Item No:TS01008.4MT
 Power:30W
 CRI:90
 Size:φ85.5*150mm
 Rotating:345°
 Tilt:90°
 Lumen:90-100lm/w





LED: bridge lux

Material:Aluminum

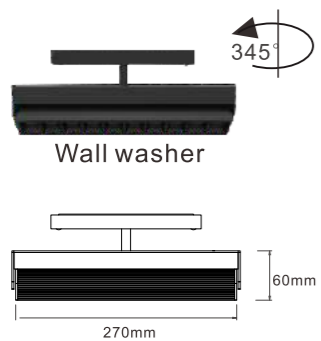



LIGRE

Item No:TS01011.1MT
 Size:60*270mm
 Power:20W
 CRI:80
 Efficiency:90lm/W
 optics optional :15° /30° /45°
 Material:Aluminum

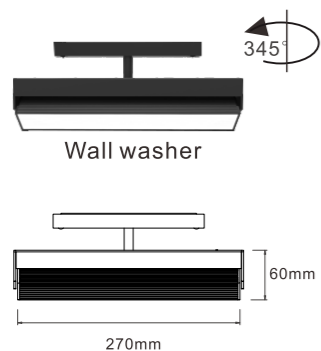

LIBRE


Item No:TS01012.1MT
 Size:60*270mm
 Power:20W
 CRI:80
 Efficiency:90lm/W
 Material:Aluminum

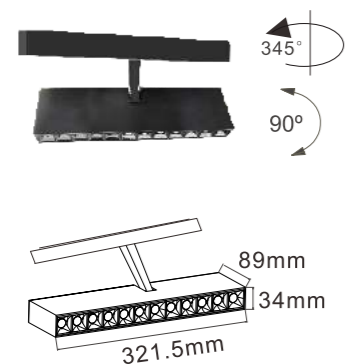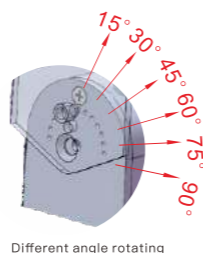


Damier

Item No:TS01001.12MT
 Size:34*321.5mm
 Power:30W
 CRI:80
 Efficiency:90lm/W
 optics:45°
CREE


ONE

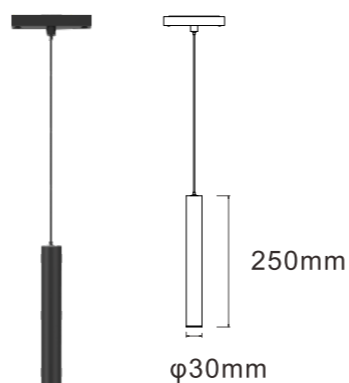

ONE

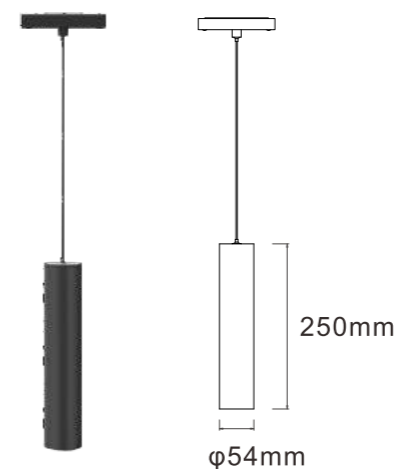

ONE

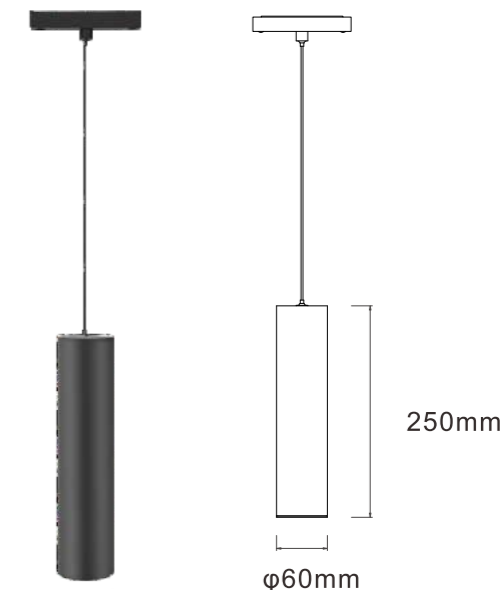

Item No:P01005-30MT
 Size:φ30*250mm
 Power:5W
 CRI:90
 Efficiency:90-100 lm/W
 optics:40°



Item No:P01005-54MT
 Size:φ54*250mm
 Power:10W
 CRI:90
 Efficiency:90-100 lm/W
 optics:15° /25° /38° /60°



Item No:P01005-60MT
 Size:φ60*250mm
 Power:15W
 CRI:90
 Efficiency:90-100 lm/W
 optics:15° /25° /38° /60°








TK01001

Magnetic track (Surface)

COLOUR: WH BK

LENGTH:
1000mm/1500mm/2000mm/3000mm




TK01005

Magnetic track (Resessed)

COLOUR: WH BK

LENGTH:
1000mm/1500mm/2000mm/3000mm




TK01002

Magnetic track (Surface/pendant)


COLOUR: WH BK

LENGTH:
1000mm/1500mm/2000mm/3000mm

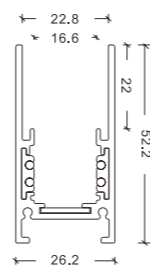

TK01006

Power Supply




TK01003

Magnetic track (Surface/pendant)



COLOUR: WH BK

LENGTH:
1000mm/1500mm/2000mm/3000mm



TK01007

Mini I Connector

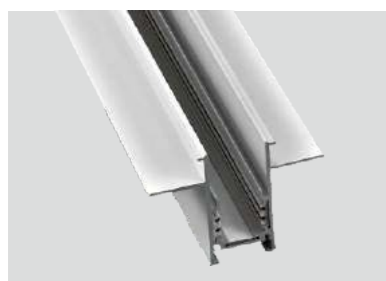


TK01004

Magnetic track (Track resessed)


COLOUR: WH BK


LENGTH:
1000mm/1500mm/2000mm/3000mm





TK01008

L Connector

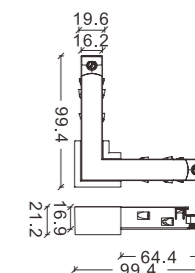


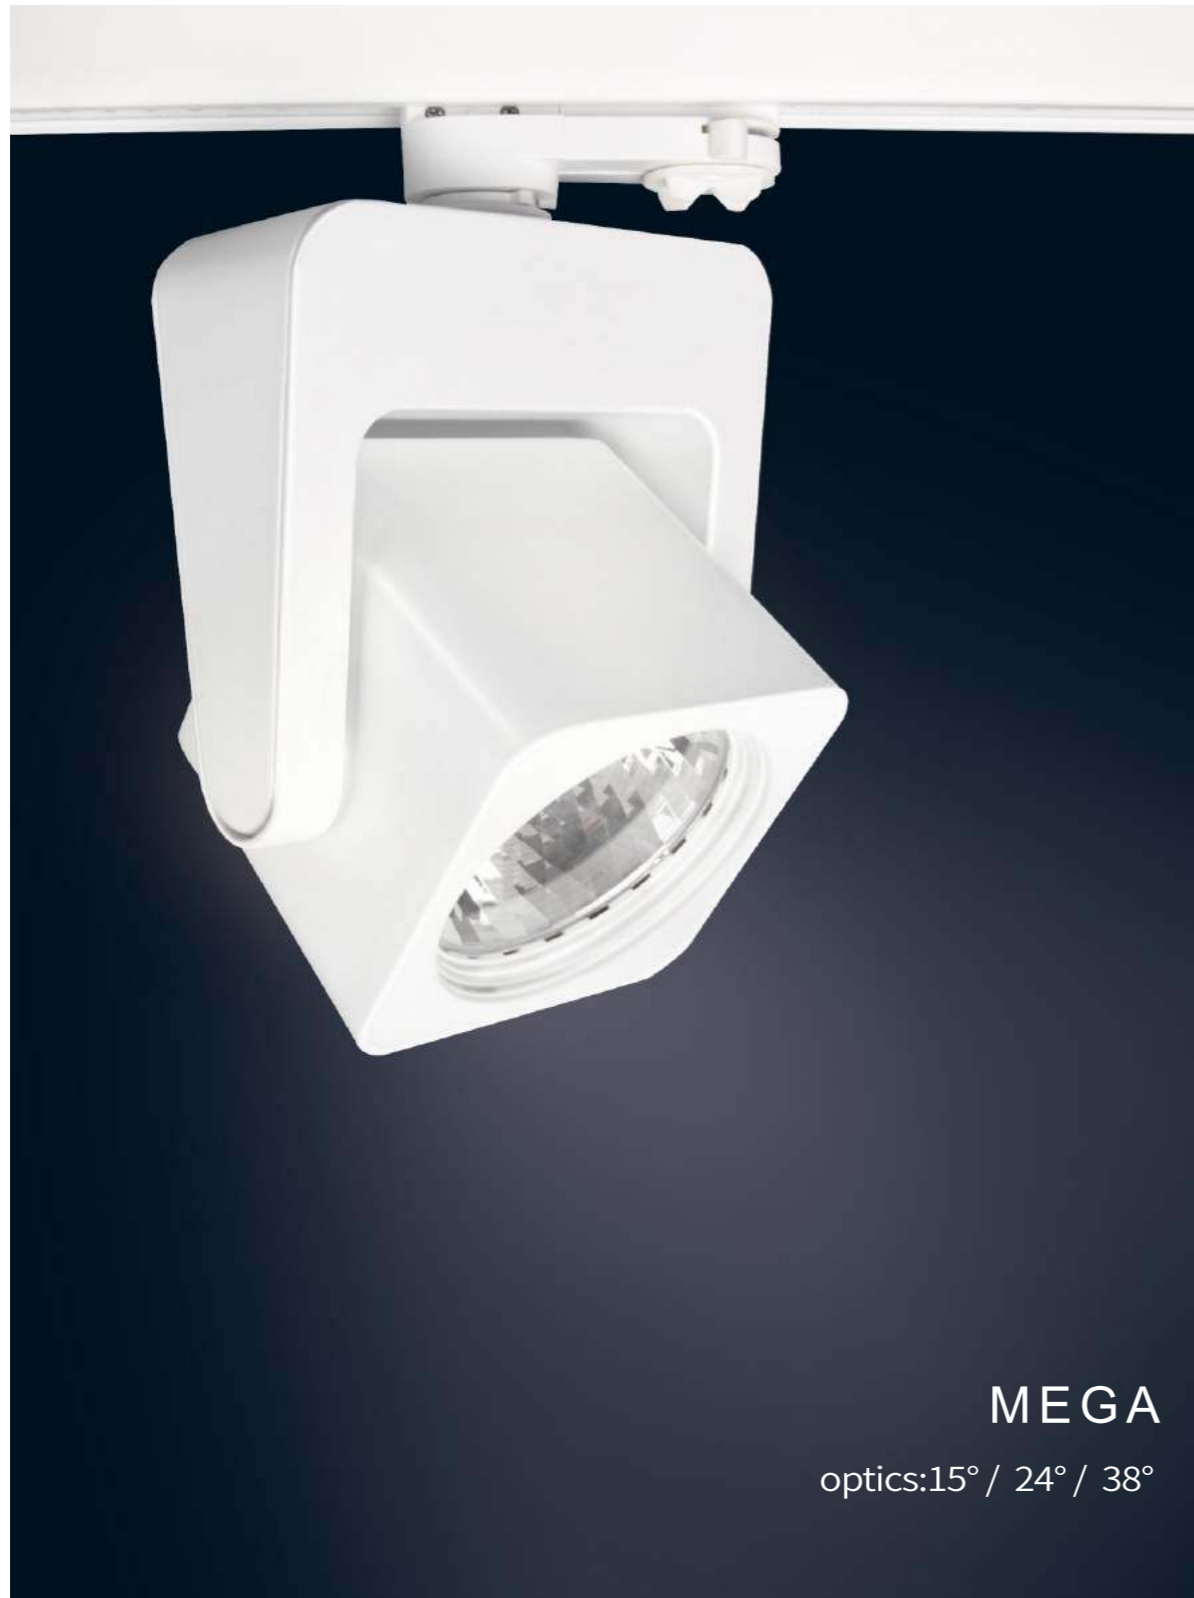

MEGA
optics:15° / 24° / 38°


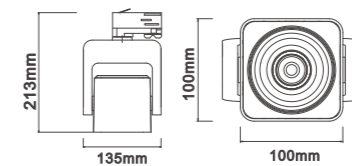


Item No.	Power/W	Lumen/LM	Size/MM	CRI
TS01005.1	20W	2579lm	213*100mm	>80
TS01005.2	30W	4450lm	213*100mm	>80
TS01005.3	40W	5352lm	213*100mm	>80

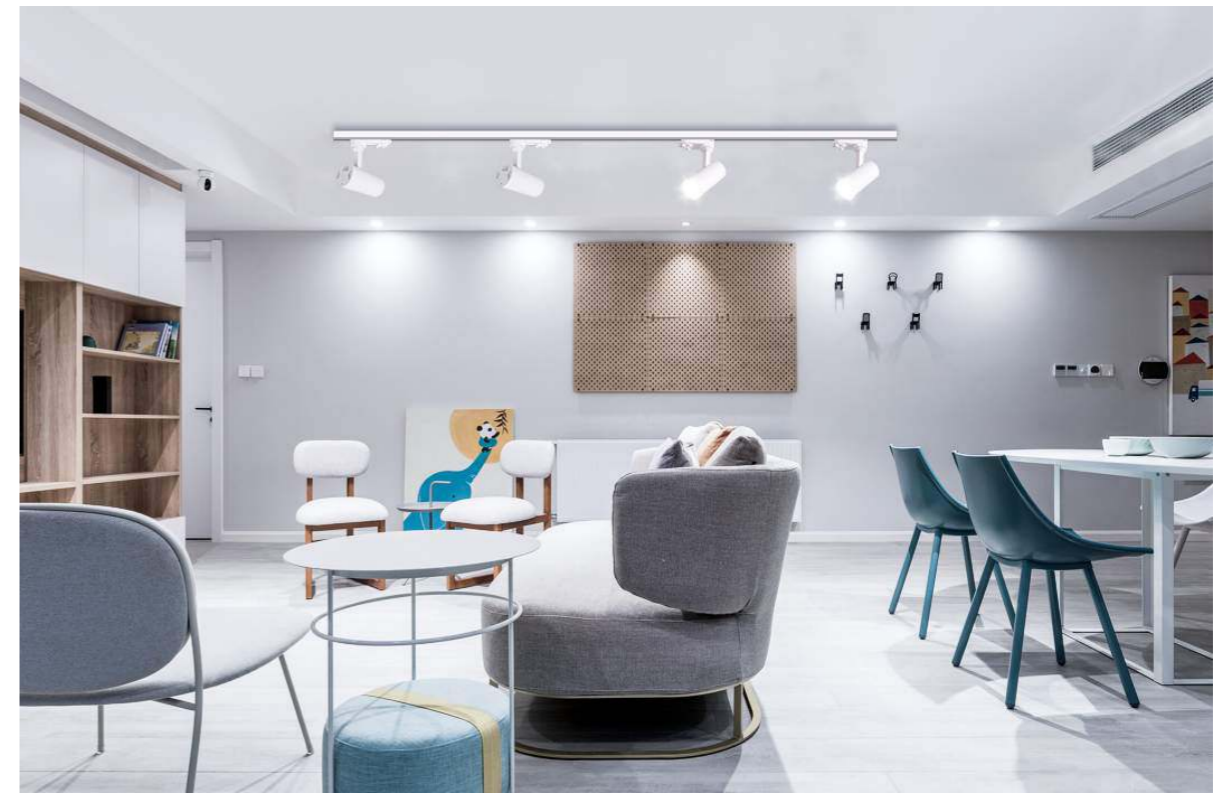

PEN

optics available with 15°/ 38°/ 60°





Item No.	Power/W	Lumen/LM	Size/MM	CRI
TS01002-50	10W	1267lm	52*109mm	>80



CANNON



Two installation methods
One more choice One more change
optics available with 15°/ 38°/ 60°

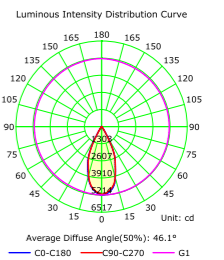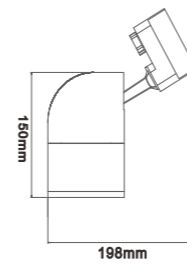

Item No.	Power/W	Lumen/LM	Size/MM	CRI
TS01002-100	20W	2655lm	150*198mm	>80
TS01002-100	30W	4095lm	150*198mm	>80

HIMA

355° Horizontal rotation & 90° vertical to arrive to all different baam needed A real replacement of HID track light with 35W COB LED. For commercial lighting shops, showroom, museum and gallery

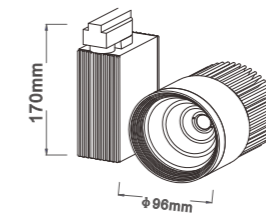



optics : 15° / 24° / 40° / 60°



Item No.	Power/W	Lumen/LM	Size/MM	CRI
TS01009.3	25W	2399lm	96*127mm	>80
TS01009.4	35W	2450lm	109*124mm	>80



NO FLICKER
LINEAR SPOT

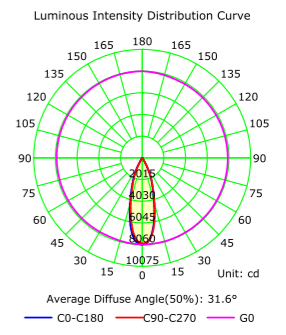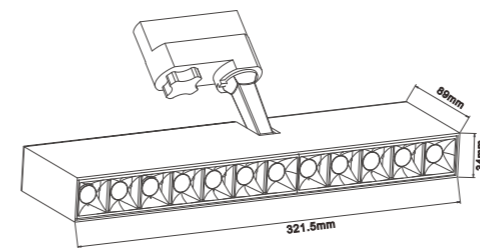

optics:45°



Item No.	Power/W	Lumen/LM	Size/MM	CRI
TS01001-12T	35W	3356lm	H34*L321.5mm	>80





AIRY

Do whatever you want
Feel free to adjust it






Different angle rotating

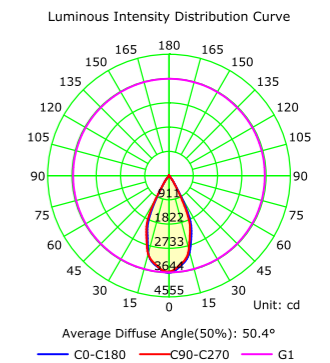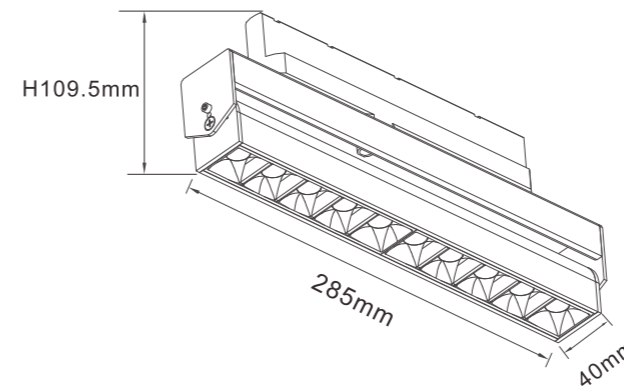

optics :15° /30° /45°



Item No.	Power/W	Lumen/LM	Size/MM	CRI
TS01006	30W	2800lm	H109.5*285mm	>80

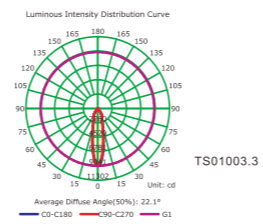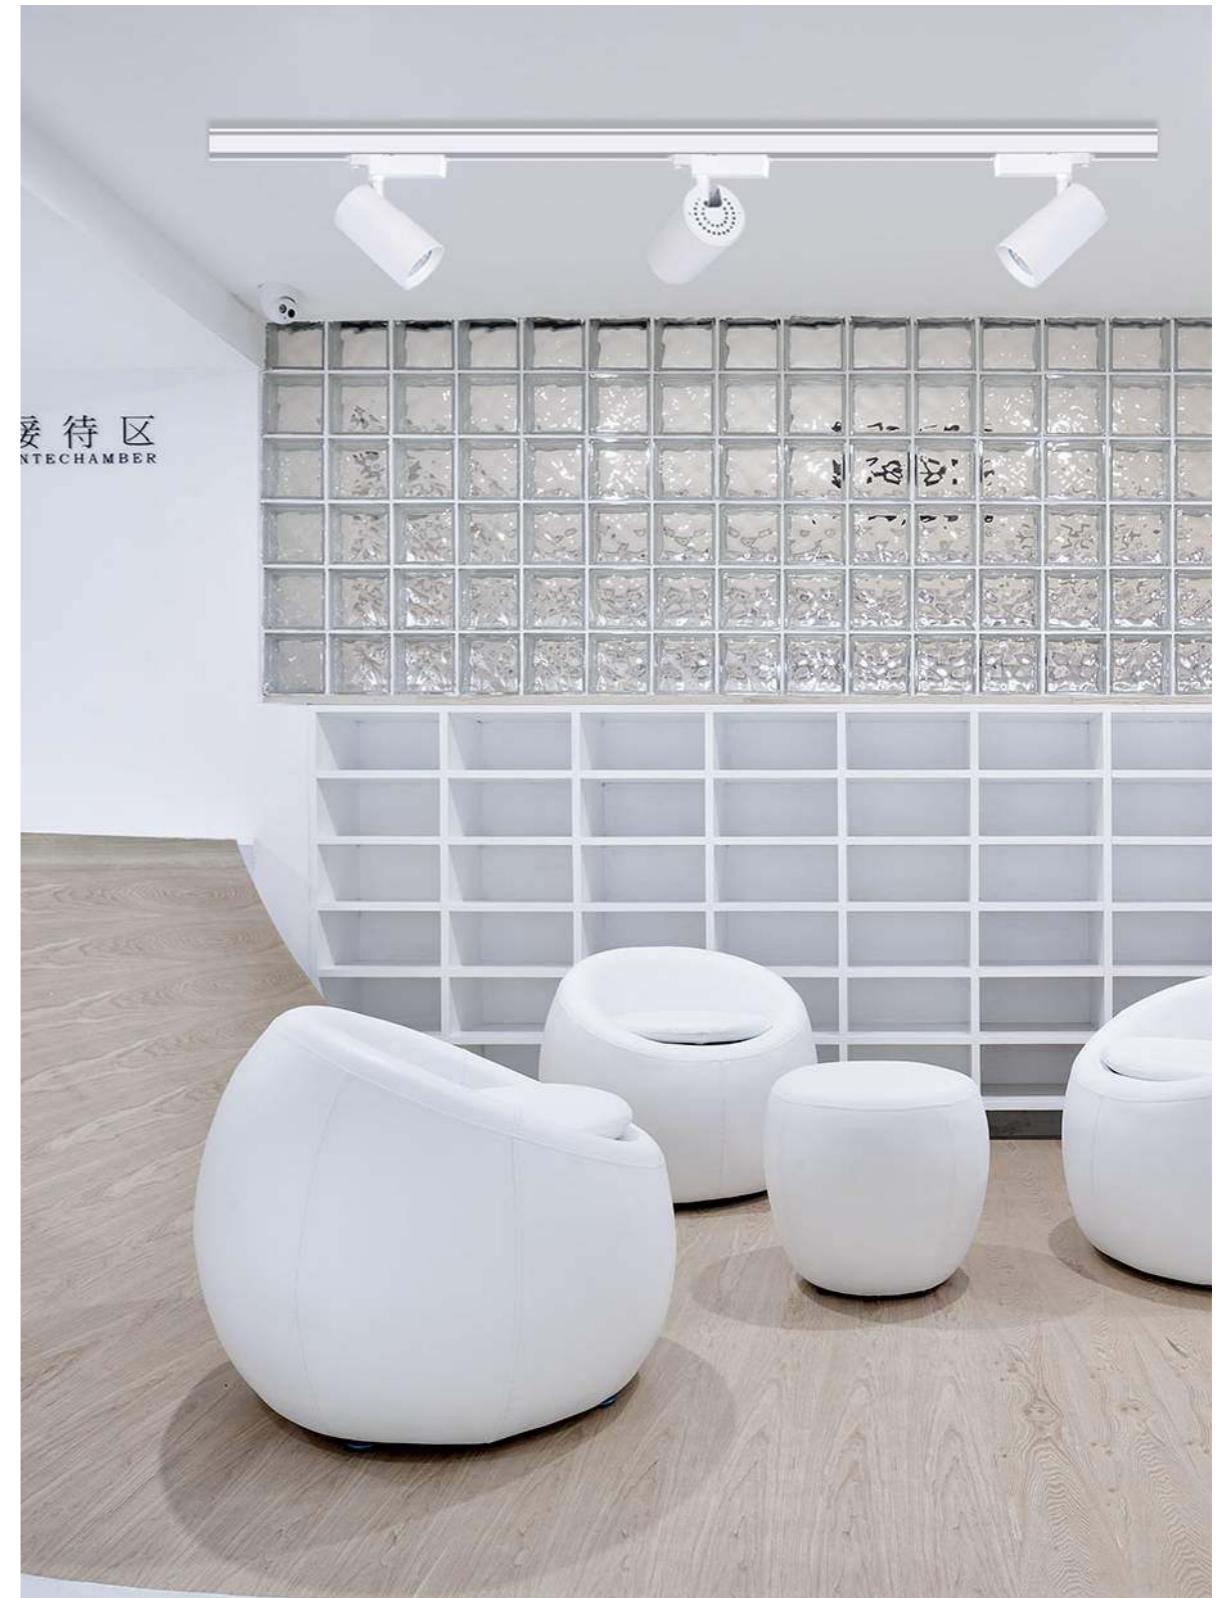

optics :15° / 24° / 40° / 60°



Item No.	Power/W	Lumen/LM	Size/MM	CRI
TS01003.1	10W	1100lm	66*120mm	>80
TS01003.2	20W	2200lm	66*140mm	>80
TS01003.3	22W	2420lm	85*140mm	>80
TS01003.4	33W	3300lm	85*160mm	>80




MAC

MAC




C01010-1F

Material:Aluminum
Adjustable angle:Rotating:328° tilting:90°
lamp:1x GU10 , Max 50W




C01010-1R

Material:Aluminum
Adjustable angle:Rotating:328° tilting:90°
lamp:1xGU10 , Max 50W





C01010-2F

Material:Aluminum
Adjustable angle:Rotating:328° tilting:90°
lamp:2x GU10 , Max 2x50W




C01010-4F

Material:Aluminum
Adjustable angle:Rotating:328° tilting:90°
lamp:4xGU10,Max 4x50W

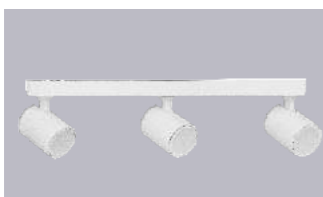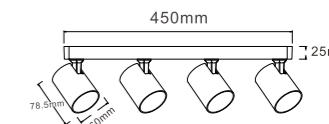


C01010-3F

Material:Aluminum
Adjustable angle:Rotating:328° tilting:90°
lamp:3x GU10 , Max 3x50W

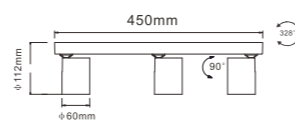

C01010-3R

Material:Aluminum
Adjustable angle:Rotating:328° tilting:90°
lamp:3x GU10 , Max 3x50W






BLACK

BLACK




C01032-1F

Material:Aluminum
Adjustable angle:Rotating:328° tilting:90°
lamp:1xGU10 , Max 50W




C01032-1R

Material:Aluminum
Adjustable angle:Rotating:328° tilting:90°
lamp:1xGU10 , Max 50W




C01032-2F

Material:Aluminum
Adjustable angle:Rotating:328° tilting:90°
lamp:2xGU10 , Max 2x50W




C01032-3R

Material:Aluminum
Adjustable angle:Rotating:328° tilting:90°
lamp:3xGU10 ,Max 4x50W




C01032-3F

Material:Aluminum
Adjustable angle:Rotating:328° tilting:90°
lamp:3xGU10 , Max 3x50W



GU10 SPOT LIGHT

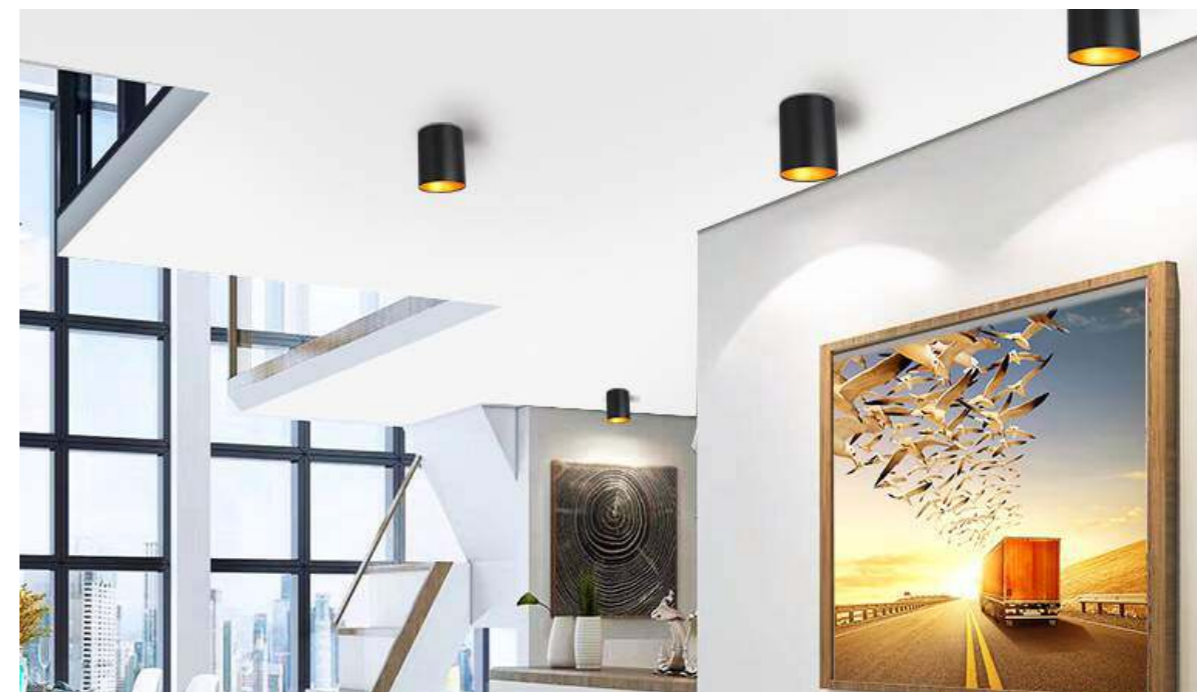


C01024



KOLO





Screwless
Easy installation




C01025



KUBUS



Bracket



C01027




VITTA



Fix




Screwless
Easy installation





XL6304L

Size: $\phi 87 \times H22$ mm Hole cut: $\phi 75$ mm
 Color: Matt white Shine white Black
 Satin nickle Anti brass
 Material: Zinc Alloy

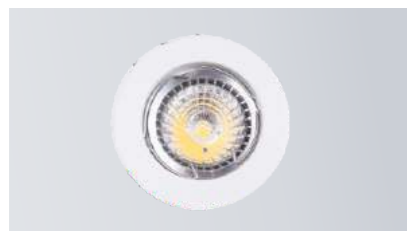

XL6208L

Size: $\phi 78 \times H24.5$ mm Hole cut: $\phi 65$ mm
 Color: Matt white Shine white Black
 Satin nickle Anti brass
 Material: Zinc Alloy




XL6106L

Size: $\phi 84 \times 84 \times H20$ mm Hole cut: $\phi 75$ mm
 Color: Matt white Shine white Black
 Satin nickle Anti brass
 Material: Zinc Alloy



XL6810L

Size: $\phi 95 \times H20$ mm Hole cut: $\phi 85$ mm
 Color: Sand white Matt white Black
 Aluminum/Shine
 Material: Aluminum



XL6903L-1B

Size: $92 \times 92 \times H23$ mm Hole cut: 85 mm
 Color: Sand white Matt white Black
 Aluminum/Shine
 Material: Aluminum




XL6903L-2B

Size: $173 \times 92 \times H23$ mm Hole cut: 160×83 mm
 Color: Sand white Matt white Black
 Aluminum/Shine
 Material: Aluminum




XL6903L-3B

Size: $255 \times 92 \times H23$ mm Hole cut: 240×83 mm
 Color: Sand white Matt white Black
 Aluminum/Shine
 Material: Aluminum



XL6718L

Size: $\phi 84 \times H30$ mm Hole cut: $\phi 65$ mm
 Color: Matt white Shine white Black
 Satin nickle Anti brass
 Material: Zinc Alloy



XL6719L

Size: 82×82 mm Hole cut: 65 mm
 Color: Matt white Shine white Black
 Satin nickle Anti brass
 Material: Zinc Alloy

